

**SOLENOID VALVE DIRECT ACTING 2/2 WAY N.C. (5201 N.O.)**  
*Elettrovalvola azione diretta 2/2 vie N.C. (5201 N.A.)*



Series 52



**HIGHLIGHTS**


- 2/2 way direct acting N.C (5201 N.O)
- 0 – 25 bar
- G 1/8 "
- Body sealing seat available in Stainless Steel
- Seals/Tenuta: NBR – EPDM – FKM – HNBR
- Serviceable valve

**PRODUCT DESCRIPTION**

Solenoid valve 2/2 way, normally closed with the exception of the 5201 which is normally open. The body valve is made in brass, while the core tube is made in stainless steel. **The tube can be also unscrewed in order to make ordinary maintenance.** It is suitable for various applications, compatible with different fluids and temperature.

**DESCRIZIONE PRODOTTO**

*Elettrovalvola 2/2 vie, normalmente chiusa con l'eccezione della 5201 che è normalmente aperta. Il corpo valvola è realizzato in ottone, mentre il tubo guida è realizzato in acciaio inossidabile. **Il cannotto può essere anche svitato per fare manutenzione ordinaria.** È adatto per varie applicazioni, compatibili con differenti fluidi e temperature.*




**GENERAL FEATURES / CARATTERISTICHE GENERALI**

Body material / Materiale corpo	Brass		
Seal material / Materiale di tenuta	EPDM	NBR	FKM
Temp. °C	140°	90°	150°
Tube material / Materiale tubo	Stainless steel or brass		
Working fluids / Applicazioni fluidi	Air, water, steam		
Electrical connect. / Connes. elettrica	6,3 x 0,8 fast-on terminal - UNI ISO 6952		
Insulation class / Classe di isolamento	H		
Coil voltage / Voltaggio	220-230VAC / 50-60Hz	100-120VAC / 60Hz	12-24 VDC
Coil power / Potenza bobina	13,5 VA	14 VA	10 W
Ambient temp. / Temp. ambiente	120°C	80°C	80°C
Fluid temp. / Temp. fluido	140°C	145°C	140°C

**SPECIFICATIONS / CARATTERISTICHE**

	CONNECTION	ORIFICE Ø (mm)	KV m³/h	M.O.P.D. (bar)		DIMENSIONS (mm)			CODE
				AC	DC	A	B	C	
N.C	G 1/8	1,5	0.070	17	10	33	63	40	5211
	G 1/8	1,6	0.075	25	12	30	63,6	40	5252
	G 1/8	2,0	0.110	17	10	30	63,6	40	5252
	G 1/8	2,8	0.180	4,5	1,5	30	63,6	40	5252
N.A	R 1/8 - G 1/8	1,5	0.070	20	22	22	62,5	40	5201

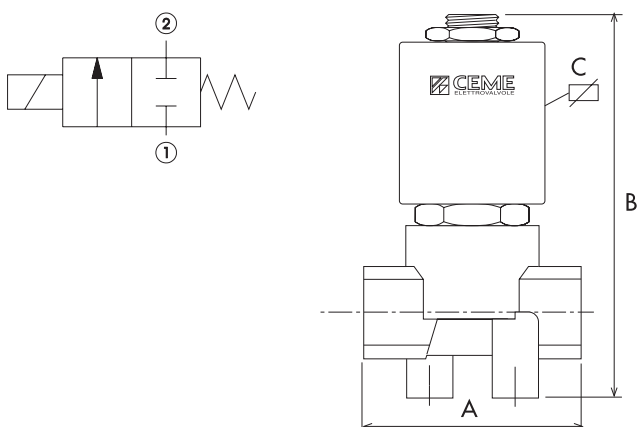

HYDRAULIC CONNECTION	
2/2 WAY NC	2/2 WAY NO
IN/OUT G1/8"	IN/OUT G1/8"
5220 <sup>(1)</sup>	5201 <sup>(2)</sup>

Notes:  
 Food grade nickel treatment available on demand / trattamento al nichel alimentare disponibili su richiesta  
 (1): Stainless steel tube / Tubo in acciaio inox  
 (2): Also available with IN quick connection / OUT hose bib connection (Series 5243)  
 Disponibile anche con IN connessione rapida / OUT portagomma (Series 5243)