


**Pneumatic - Spring**

Coding: T488.1.11.1

**Operational characteristics**

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max working pressure (bar)	10
Temperature °C	-5 ÷ +50
Flow rate at 6 bar with Δp=1 (NI/min)	620
Orifice size (mm)	6
Working ports size	G 1/8"

TYPE	
① 32 = 3 ways	
52 = 5 ways	




AIR DISTRIBUTION

3 ways



Weight 75 g  
Minimum working pressure 2,5 bar

T488.32.11.1

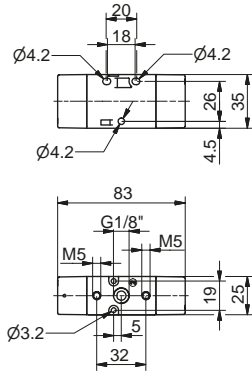


5 ways



Weight 75 g  
Minimum working pressure 2,5 bar

T488.52.11.1




**Pneumatic - Differential (External)**

Coding: T488.1.11.12

**Operational characteristics**

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max working pressure (bar)	10
Temperature °C	-5 ÷ +50
Flow rate at 6 bar with Δp=1 (NI/min)	620
Orifice size (mm)	6
Working ports size	G 1/8"


TYPE	
① 32 = 3 ways	
52 = 5 ways	



3 ways




T488.32.11.12

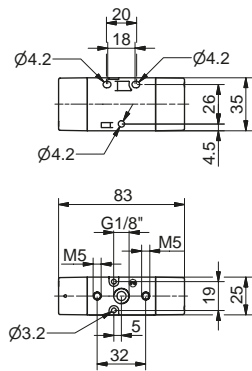

5 ways



T488.52.11.12




**Pneumatic - Pneumatic**

Coding: T488.1.11.11

**Operational characteristics**

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max working pressure (bar)	10
Temperature °C	-5 ÷ +50
Flow rate at 6 bar with Δp=1 (NI/min)	620
Orifice size (mm)	6
Working ports size	G 1/8"

TYPE	
① 32 = 3 ways	
52 = 5 ways	




3 ways



Minimum working pressure 2 bar (for Pneumatic-Pneumatic version)

T488.32.11.11

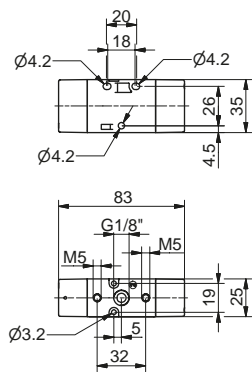


5 ways



Minimum working pressure 2 bar (for Pneumatic-Pneumatic version)

T488.52.11.11




**Pneumatic - Pneumatic 5 ways 3 connections**



Coding: T488.53.F.11.11

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max working pressure (bar)	10
Temperature °C	-5 ÷ +50
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	410
Orifice size (mm)	6
Working ports size	G 1/8"

FUNCTION	
<b>F</b>	31 = Closed centres
	32 = Open centres
	33 = Pressured centres



Weight 140 g  
Minimum working pressure 3 bar (for Pneumatic-Pneumatic version)



1  
AIR DISTRIBUTION