

Air service units series 1700 Steel line



General

The stainless steel SS1700 air treatment series has been engineered and developed to approach specifically the OIL & GAS industry and more widely for all the severe service applications that require excellent corrosion resistance due to chemical and/or harsh environmental condition. **All external and internal parts (except for the automatic drain version) are AISI 316L stainless steel material in compliance with NACE standard MR0175/ISO 15156/1.** The product range includes FILTER, with filtration elements up to 3 filtration degree (5µm-20 µm-50 µm), available in AISI316 stainless steel or HDPE (high density polyethylene), and manual or automatic condensed exhaust; The PRESSURE REGULATOR is supplied with low hysteresis rolling diaphragm and an over-pressure exhaust valve (RELIEVING), available in 4 different adjustment ranges from 0 to 12 bar. As a last the FILTER REGULATOR range, which combines the features of a filter and pressure regulator into a one single device. "CLEAN PROFILE" version is available for all the sizes, featuring a glossy finish on the external surface. The over-pressure exhaust hole (RELIEVING) has a 1/8" NPT threading, and it is protected by an AISI 316 sintered filter series. Note: for CLEAN PROFILE series this is a simple unthread hole.

Construction and operational characteristics

Body, bowl and adjustment mechanism	AISI 316L stainless steel
Caseback regulator	AISI 316L stainless steel
Adjustment screw, locking nut and fastening screws	AISI 316L stainless steel (stainless steel A4-70)
Internal components	AISI 316L stainless steel
Filtering elements	AISI 316 stainless steel or HDPE (High density polyethylene)
Spring	AISI 316 stainless steel
Seals	

NBR (standard versions and automatic drain)	NBR for low temperatures (L versions)	Silicone - PU (Z version)
FPM - HNBR (H versions)	EPDM-FDA (EF versions)	

Automatic drain Brass, stainless steel AISI 304 and AISI 302, sintered bronze
Acetal resin , NBR, FPM

Operating Range

Fluid Filtered air. No lubrication needed, if applied it shall be continuous.
Inert gases.
Natural gases

Temperature		
-30°C ... +80°C (standard version)	-5°C ... +150°C (high temperature H version)	-40°C ... +100°C (EPDM-FDA version)
-50°C ... +80°C (low temperature L version)	-5°C ... +70°C (automatic drain S version)	
-60°C ... +80°C (low temperature version -60 °C Z)	-5°C ... +70°C (reduced orifice automatic drain SR version)	

Maximum working pressure		
20 bar (standard, low and high temperature versions)	16 bar (automatic drain version)	10 bar (reduced orifice automatic drain version)

Instructions for installation and use




Product shall be installed reducing the distance from inlet point. Check and install the device following the flow direction (clearly marked with an arrow stamped on the body). Vertical position installation with condensed exhaust tap pointing downward is recommended. Devices must be used in compliance with pressure and temperature operating range. To set the pressure there is an adjustable knob, located on the top of the device. Pneumax recommend selection of pressure regulator adjusting range option in line with client required performance. The condensed exhaust action for the manual drain version shall be performed only in the absence of pressure. To discharge liquid, turn the tap clockwise until the discharge of liquid is triggered, then tighten it all the way.

Maintenance




Filtration elements and filter regulator are reusable through blowing and/or washing and is made of stainless steel or HDPE (high density polyethylene). To replace, remove the cup, loosen the set screw of the support and replace the filter element with a new one or refurbished one. Replace the regulator diaphragm whenever the performance is compromised or if there is a continuous discharge from the relieving hole (over-pressure exhaust). Fully discharge the adjustment spring before removing the adjustment mechanism. For other maintenance activities, due to complexity of assembly and requirement for dedicated PNEUMAX testing activities, it is strongly recommended to contact the manufacturer.

Certifications available




Filter regulators

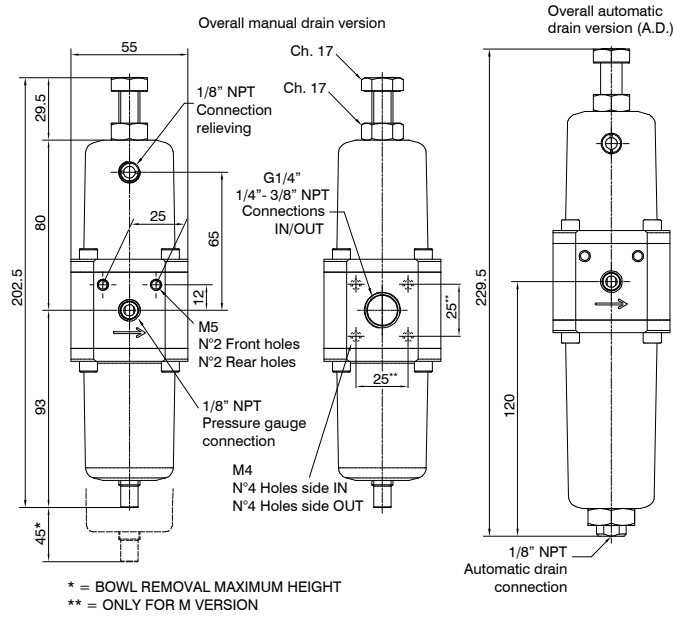


Ordering code	
SV172CESGTO	
VERSION	
V	S = Standard surface finishing
	F = Clean profile
	M = Modular assembly version
CONNECTIONS	
C	A = 1/4" NPT
	B = 3/8" NPT
	C = G1/4"
FILTER PORE SIZE	
	A = 5 µm - 316 stainless steel
S	B = 20 µm - 316 stainless steel
	C = 50 µm - 316 stainless steel
	D = 5 µm - HDPE
	E = 20 µm - HDPE
	F = 50 µm - HDPE
PRESSURE RANGE	
G	A = 0-2 bar
	B = 0-4 bar
	C = 0-8 bar
	D = 0-12 bar
TYPE	
T	= Standard*
	N = Without relieving
OPTIONS	
	= Standard*
	L = Low temperature
	Z = Low temperature (-60 °C)
O	H = High temperature
	S = Automatic drain
	SR = Reduced orifice automatic drain
	EF = EPDM-FDA
* no additional letter required	


Construction characteristics	Technical characteristics	
<ul style="list-style-type: none"> - Body, adjustment mechanism, AISI 316L stainless steel and caseback intern. components - AISI 316 stainless steel adjustment springs. - Fixing screws, adjustment screws and locknut in A4 (AISI 316) stainless steel. - Filter-pressure regulator diaphragm with over-pressure drain (Relieving). - Low hysteresis rolling diaphragm. - Balanced system. - Manual or automatic condensed drain. 	Maximum inlet pressure (standard version)	20 bar
	Maximum inlet pressure (automatic drain version)	16 bar
	Maximum inlet pressure (reduced orifice automatic drain version)	10 bar
	Temperature (standard version)	-30°C ... +80°C
	Temperature (low temperature version)	-50°C ... +80°C
	Temperature (low temperature version -60 °C)	-60°C ... +80°C
	Temperature (high temperature version)	-5°C ... +150°C
	Temperature (automatic and reduced orifice drain version)	-5°C ... +70°C
	Temperature (EPDM-FDA version)	-40°C ... +100°C
	Pressure gauge connection	1/8" NPT
	Weight	1470 (gr.)
	Bowl capacity	15 cm ³
	Assembly positions	Vertical
Note		
The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.		

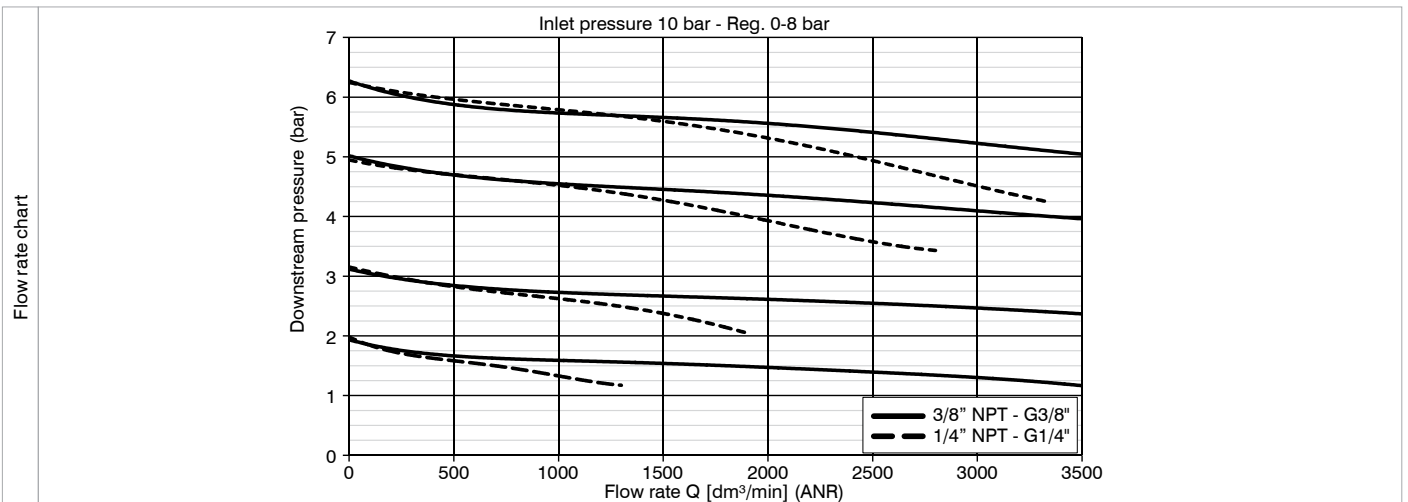

Pressure regulator Stainless steel line have been designed to withstand a **60 bar** maximum inlet pressure.
Maximum regulated outlet pressure is 20 bar.
For performance details please refer to diagram alongside.

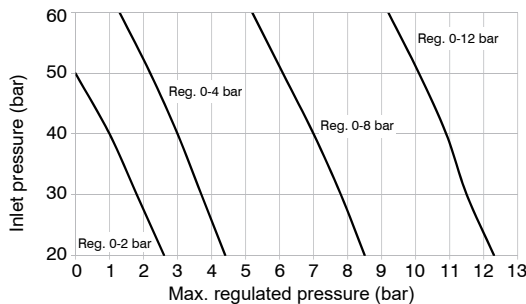

Filter regulators

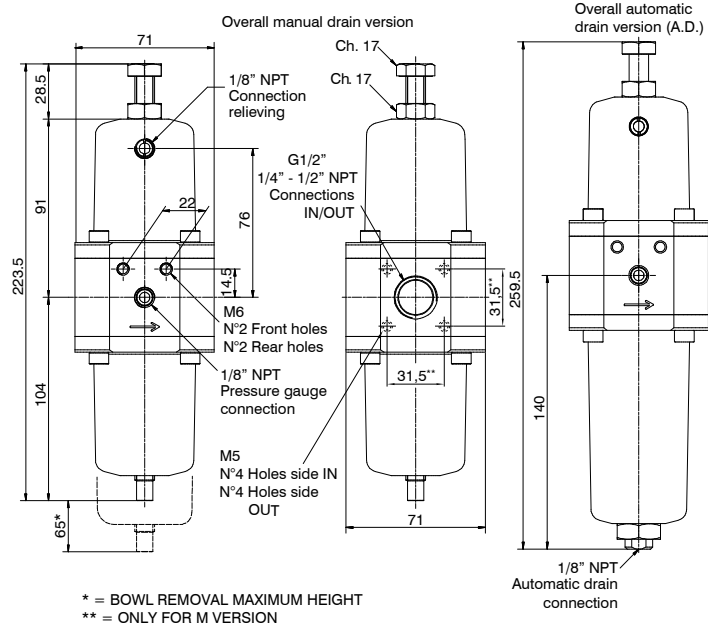



* = BOWL REMOVAL MAXIMUM HEIGHT
** = ONLY FOR M VERSION

Ordering code	
S01730ESGTO	
VERSION	
S	Standard surface finishing
V	Clean profile
M	Modular assembly version
CONNECTIONS	
A	1/4" NPT
C	1/2" NPT
D	G1/2"
FILTER PORE SIZE	
A	5 µm - 316 stainless steel
B	20 µm - 316 stainless steel
C	50 µm - 316 stainless steel
D	5 µm - HDPE
E	20 µm - HDPE
F	50 µm - HDPE
PRESSURE RANGE	
A	0-2 bar
B	0-4 bar
C	0-8 bar
D	0-12 bar
TYPE	
1	Standard*
N	Without relieving
OPTIONS	
	Standard*
L	Low temperature
Z	Low temperature (-60 °C)
H	High temperature
S	Automatic drain
SR	Reduced orifice automatic drain
EF	EPDM-FDA
* no additional letter required	

Construction characteristics	Technical characteristics	
- Body, adjustment mechanism, AISI 316L stainless steel and caseback intern. components	Maximum inlet pressure (standard version)	20 bar
- AISI 316 stainless steel adjustment springs.	Maximum inlet pressure (automatic drain version)	16 bar
- Fixing screws, adjustment screws and locknut in A4 (AISI 316) stainless steel.	Maximum inlet pressure (reduced orifice automatic drain version)	10 bar
- Filter-pressure regulator diaphragm with over-pressure drain (Relieving).	Temperature (standard version)	-30°C ... +80°C
- Low hysteresis rolling diaphragm.	Temperature (low temperature version)	-50°C ... +80°C
- Balanced system.	Temperature (low temperature version -60 °C)	-60°C ... +80°C
- Manual or automatic condensed drain.	Temperature (high temperature version)	-5°C ... +150°C
	Temperature (automatic and reduced orifice drain version)	-5°C ... +70°C
	Temperature (EPDM-FDA version)	-40°C ... +100°C
	Pressure gauge connection	1/8" NPT
	Weight	2110 (gr.)
	Bowl capacity	25 cm³
	Assembly positions	Vertical


Note

The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.

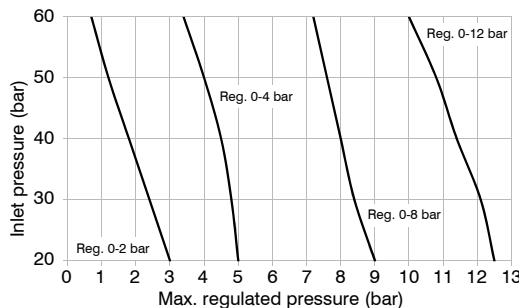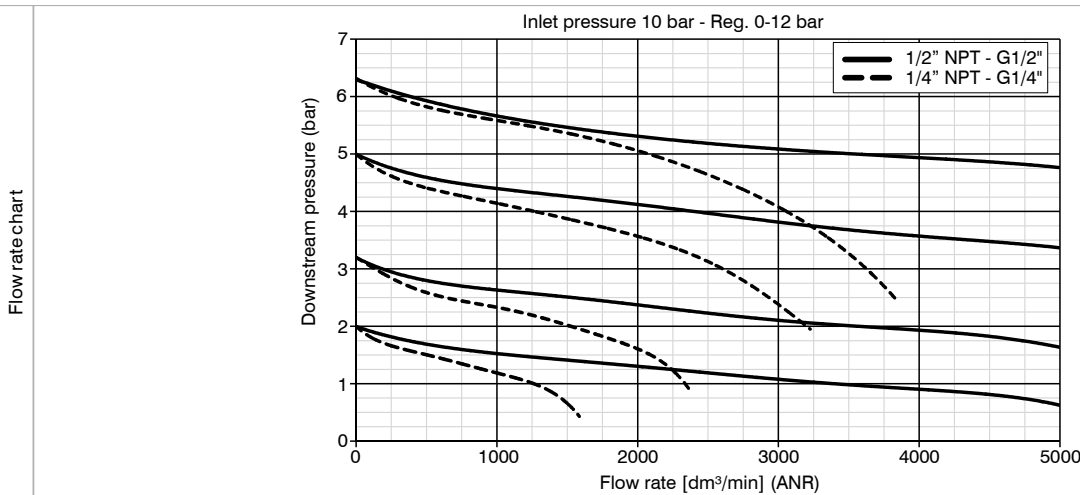


Pressure regulator Stainless steel line have been designed to withstand a 60 bar maximum inlet pressure.
Maximum regulated outlet pressure is 20 bar.
For performance details please refer to diagram alongside.

Filter regulators

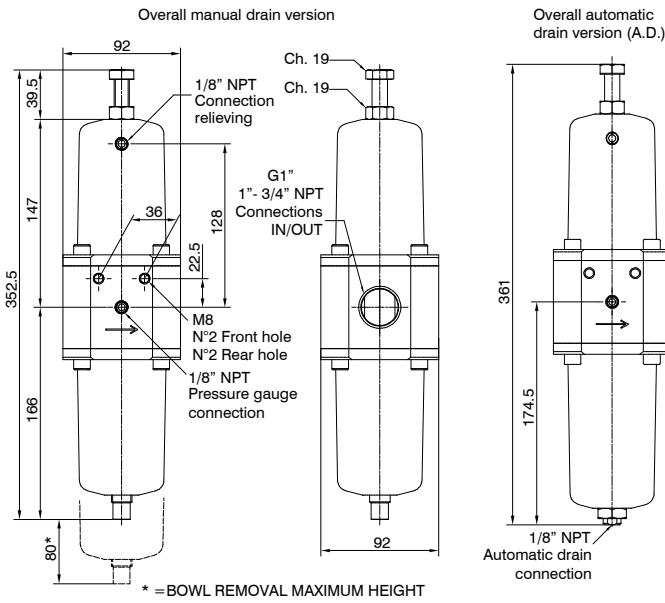

Ordering code	
S01740ESG10	
VERSION	
V	S = Standard surface finishing
	F = Clean profile
CONNECTIONS	
G	A = 3/4" NPT
	B = 1" NPT
	D = G1"
FILTER PORE SIZE	
	A = 5 µm - 316 stainless steel
S	B = 20 µm - 316 stainless steel
	C = 50 µm - 316 stainless steel
	D = 5 µm - HDPE
	E = 20 µm - HDPE
	F = 50 µm - HDPE
PRESSURE RANGE	
G	A = 0-2 bar
	B = 0-4 bar
	C = 0-7 bar
	D = 0-10 bar
TYPE	
T	= Standard*
	N = Without relieving
OPTIONS	
	= Standard*
	L = Low temperature
	Z = Low temperature (-60 °C)
O	H = High temperature
	S = Automatic drain
	SR = Reduced orifice automatic drain
	EF = EPDM-FDA
* no additional letter required	

Construction characteristics	Technical characteristics	
- Body, adjustment mechanism, AISI 316L stainless steel and caseback intern. components	Maximum inlet pressure (standard version)	20 bar
- AISI 316 stainless steel adjustment springs.	Maximum inlet pressure (automatic drain version)	16 bar
- Fixing screws, adjustment screws and locknut in A4 (AISI 316) stainless steel.	Maximum inlet pressure (reduced orifice automatic drain version)	10 bar
- Filter-pressure regulator diaphragm with over-pressure drain (Relieving).	Temperature (standard version)	-30°C ... +80°C
- Low hysteresis rolling diaphragm.	Temperature (low temperature version)	-50°C ... +80°C
- Balanced system.	Temperature (low temperature version -60 °C)	-60°C ... +80°C
- Manual or automatic condensed drain.	Temperature (high temperature version)	-5°C ... +150°C
	Temperature (automatic and reduced orifice drain version)	-5°C ... +80°C
	Temperature (EPDM-FDA version)	-40°C ... +100°C
	Pressure gauge connection	1/8" NPT
	Weight 3/4" NPT - G 3/4"	6300 (gr.)
	Weight 1" NPT - G 1"	6200 (gr.)
	Bowl capacity	78 cm³
	Assembly positions	Vertical
Note		
The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.		

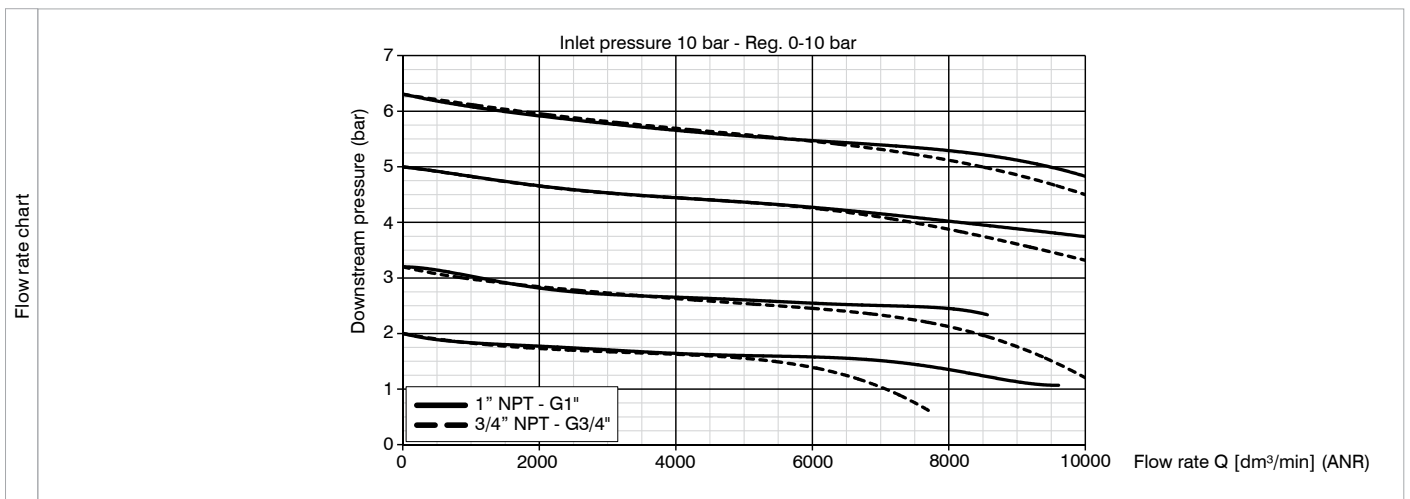

Pressure regulator Stainless steel line have been designed to withstand a **60 bar** maximum inlet pressure.
Maximum regulated outlet pressure is 20 bar.
For performance details please refer to diagram alongside.

