

## Rotary Dampers

with high-torque range

WRD-H 2515


WRD-H 3015

WRD-H 4025

WRD-H 6030



ONLINE  
CALCULATION AND  
2D / 3D CAD DOWNLOAD



## Benefits

**Material:**

- Aluminium and steel

**Applications:**

- Mechanical and plant engineering
- Vendingmachines, Counters
- Car industry and sanitary industry

**RoHS-conform:**

- Directive 2002/95/EC

**Temperature:**

- Standard: -10°C - +60°C

**Deceleration:**

- Controlled damping with rotary movements
- Torques up to 700 Nm
- Both sides, Right-turning and left-turning
- Adjustable

**Special models:**

## Stainless steel VA:


- Housing Stainless steel V2A / DIN 1.4305 / AISI 303
- Piston rod DIN 1.4125 / AISI 440C

## Applications:

- Food industry, Outside machinery, Medical technology



R (CW)*	L (CCW)*	C*	Torque max. (Nm)	Torque min. (Nm)	Torque Reverse Running L/R	Material
WRD-H 2515-R	WRD-H 2515-L	WRD-H 2515-C	10	1,5	0,8	Aluminum / Steel
WRD-H 3015-R	WRD-H 3015-L	WRD-H 3015-C	14	2,0	0,7	
WRD-H 4025-R	WRD-H 4025-L	WRD-H 4025-C	40	12,5	2,5	
WRD-H 6030-R	WRD-H 6030-L	WRD-H 6030-C	110	25,0	7,5	

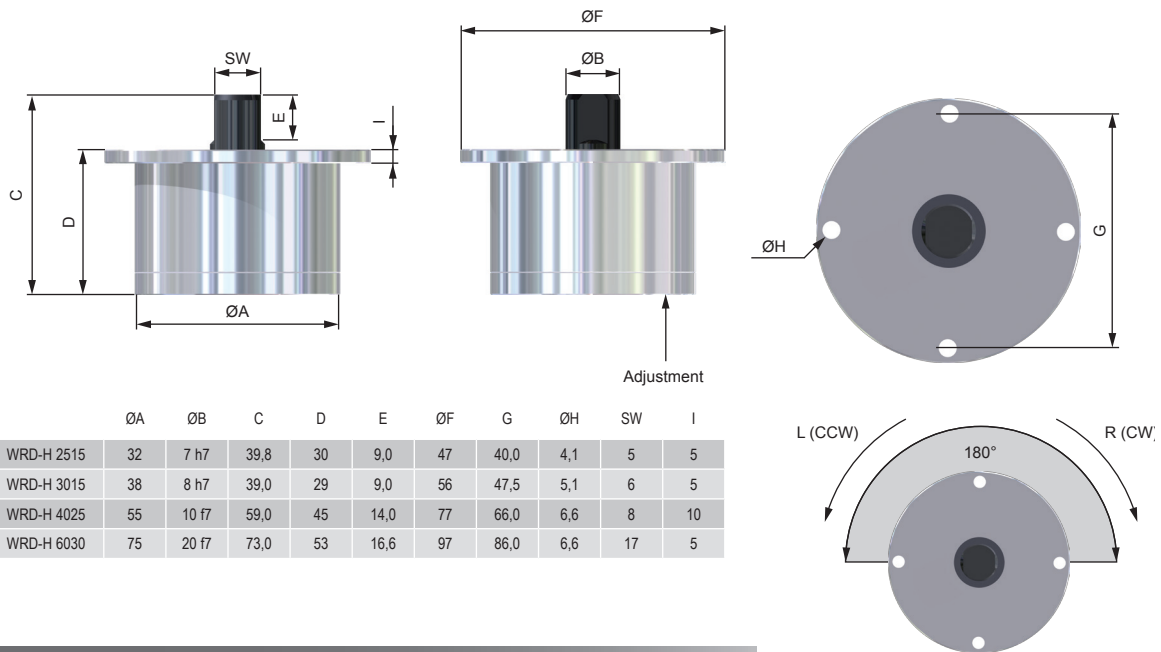

	ØA	ØB	C	D	E	ØF	G	ØH	SW	I
WRD-H 2515	32	7 h7	39,8	30	9,0	47	40,0	4,1	5	5
WRD-H 3015	38	8 h7	39,0	29	9,0	56	47,5	5,1	6	5
WRD-H 4025	55	10 f7	59,0	45	14,0	77	66,0	6,6	8	10
WRD-H 6030	75	20 f7	73,0	53	16,6	97	86,0	6,6	17	5

## STAINLESS STEEL

Clockwise	Anti-clockwise	Clockwise + anticlockwise	Torque Nm
WRD-H 2515-R-VA	WRD-H 2515-L-VA	WRD-H 2515-C-VA	10
WRD-H 3015-R-VA	WRD-H 3015-L-VA	WRD-H 3015-C-VA	14
WRD-H 4025-R-VA	WRD-H 4025-L-VA	WRD-H 4025-C-VA	40
WRD-H 6030-R-VA	WRD-H 6030-L-VA	WRD-H 6030-C-VA	110

## TORQUE

Clockwise	Anti-clockwise	Clockwise + anticlockwise	Torque Nm	Opening angle °	Weight g
WRD-H 2515-R	WRD-H 2515-L	WRD-H 2515-C	10	180	80
WRD-H 3015-R	WRD-H 3015-L	WRD-H 3015-C	14	180	107
WRD-H 4025-R	WRD-H 4025-L	WRD-H 4025-C	40	180	352
WRD-H 6030-R	WRD-H 6030-L	WRD-H 6030-C	110	180	767

Idle: At the beginning of the deceleration max. 5°

## Important Information

**Rotary dampers can not be used as end stop; external stop must be provided before the end of the stroke.**

### Temperature

WRD-H: -10 °C - +60 °C

Reference temperature for all technical information: 20°C

At a higher temperatures the energy absorption or torque is reduced.

Fix the rotary damper at the intended bores and flats. It is not allowed to load rotary dampers in a static way or to fix them by welding.

Rotary damper can not be used with aggressive fluids. Exception WRD-H...VA

### Adjustment

If the mass in a trial run impacts excessively hard on the end position select the next model with higher torque for the series

Rotary dampers of the series WRD-H 2515, 3015, 4025 and 6030 are adjustable. If the damping is not sufficient, increase the damping continuously by rotating the adjustment to „+“.

If the mass don't reach the end position or the time is too long, decrease the damping continuously by rotating the adjustment to „-“. If the adjustment

is not sufficient in an end position contact Weforma.

Rotary dampers should under no circumstance be loaded over the damping angle mentioned in the catalogue.

## Fundamentals

Rotary dampers may under no circumstances be:

-painted




-welded



-held with clamps



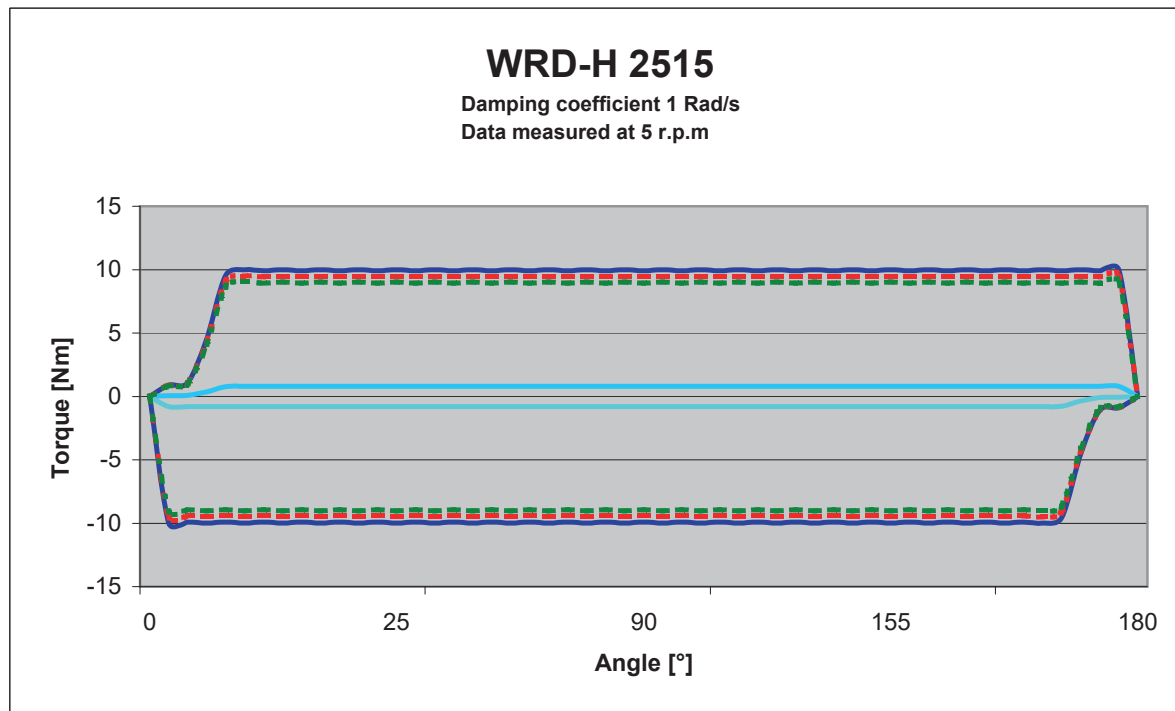

The products must be protected against contamination, fluids and air pressure. We offer special solutions for these applications. When rotary dampers are used parallel the size of the model and the used degree of hardness / used adjustment has to be the same. The load has to be distributed equally. When a shock absorber is used for an emergency case, an external end stop must be provided. If the absorption should be insufficient, please contact Weforma or the respective representation. You will find further technical informations to the series in our catalogue.



 Execution WRD-H 2515 C maximum damping in both directions at 20 ° C

 Execution WRD-H 2515 C maximum damping in both directions at 40 ° C

 Execution WRD-H 2515 C maximum damping in both directions at 60 ° C

 Execution WRD-H 2515 R maximum returndamping at 20 ° C

 Execution WRD-H 2515 L maximum returndamping at 20 ° C


Maximum angle 180°

Execution "R" and "L" only in one direction

The values may vary depending on the adjustment and the speed

This damper is adjustable

Subject to technical changes

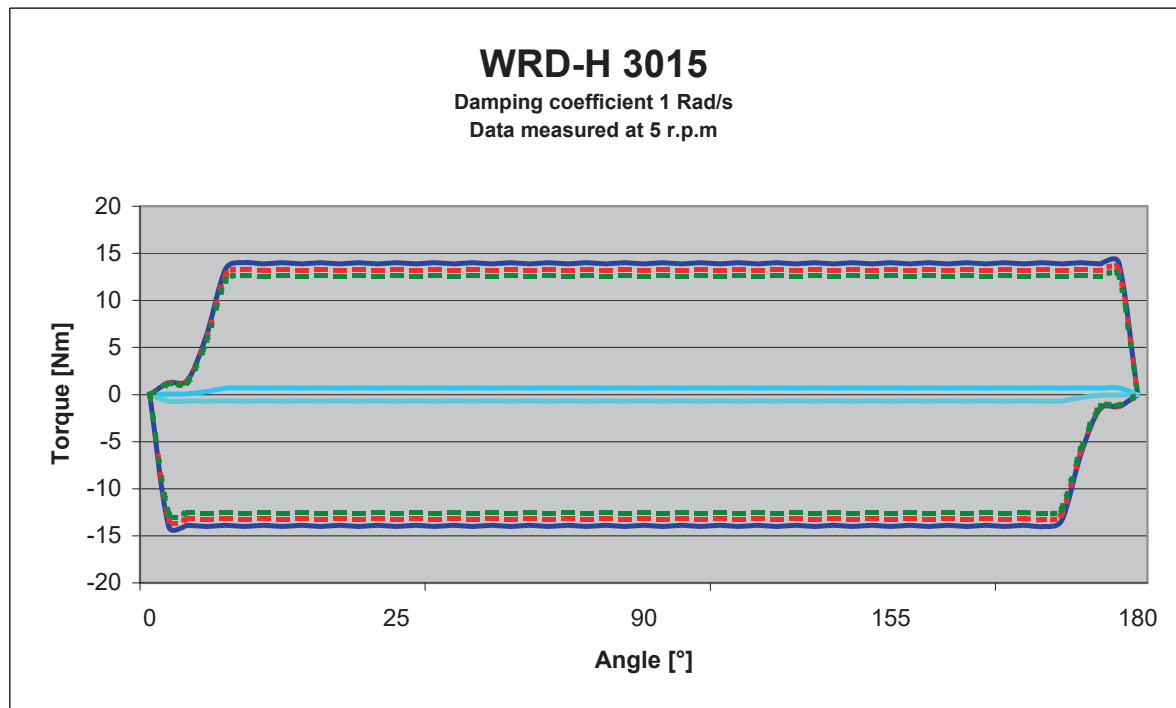

 Execution WRD-H 3015 C maximum damping in both directions at 20 ° C

 Execution WRD-H 3015 C maximum damping in both directions at 40 ° C

 Execution WRD-H 3015 C maximum damping in both directions at 60 ° C

 Execution WRD-H 3015 R maximum returndamping at 20 ° C

 Execution WRD-H 3015 L maximum returndamping at 20 ° C


Maximum angle 180°

Execution "R" and "L" only in one direction

The values may vary depending on the adjustment and the speed

This damper is adjustable

Subject to technical changes

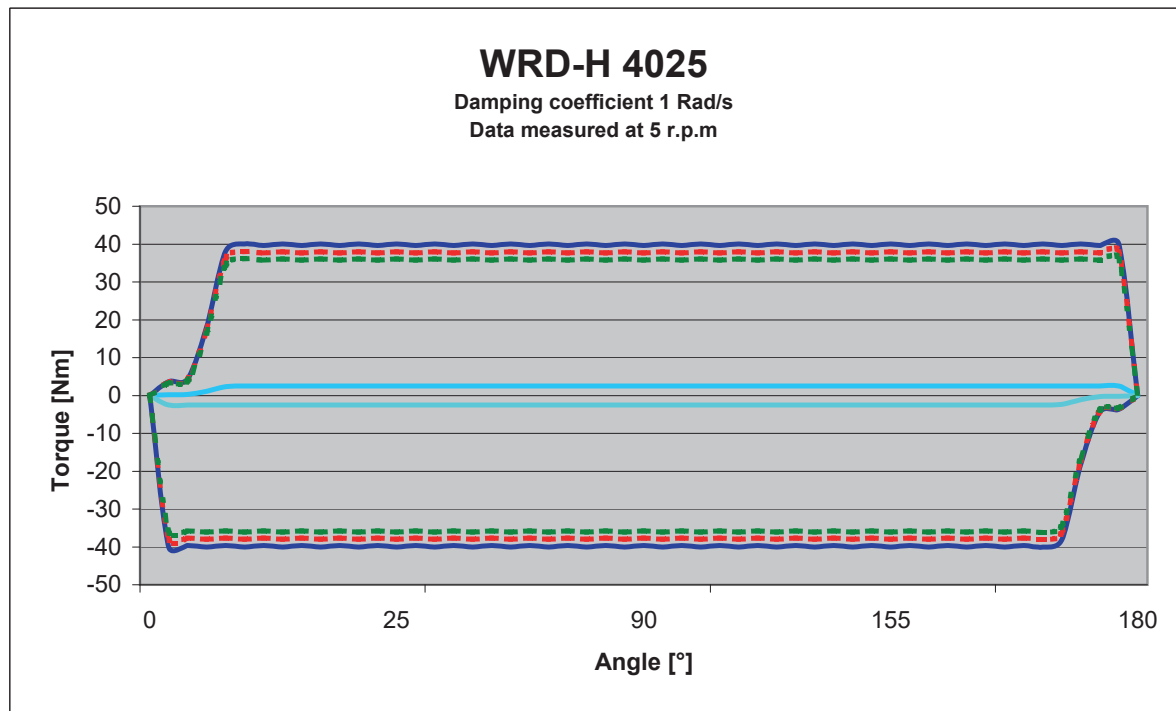

 Execution WRD-H 4025 C maximum damping in both directions at 20 ° C

 Execution WRD-H 4025 C maximum damping in both directions at 40 ° C

 Execution WRD-H 4025 C maximum damping in both directions at 60 ° C

 Execution WRD-H 4025 R maximum returndamping at 20 ° C

 Execution WRD-H 4025 L maximum returndamping at 20 ° C


Maximum angle 180°

Execution "R" and "L" only in one direction

The values may vary depending on the adjustment and the speed

This damper is adjustable

Subject to technical changes

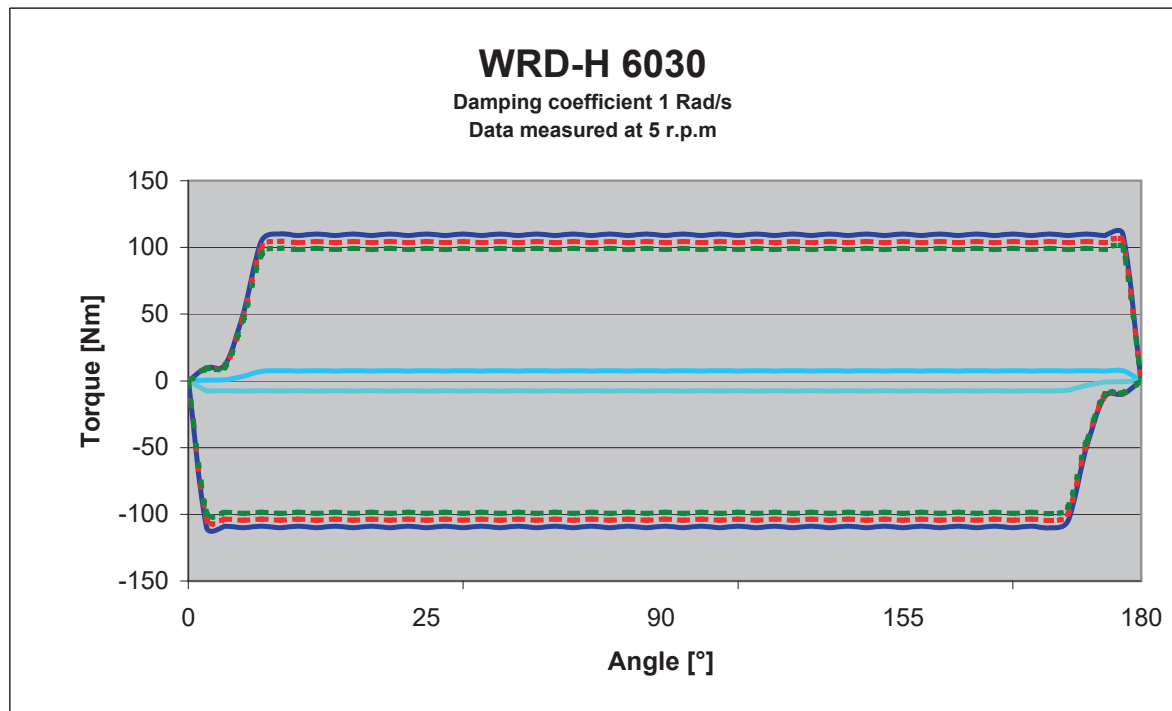

 Execution WRD-H 6030 C maximum damping in both directions at 20 ° C

 Execution WRD-H 6030 C maximum damping in both directions at 40 ° C

 Execution WRD-H 6030 C maximum damping in both directions at 60 ° C

 Execution WRD-H 6030 R maximum returndamping at 20 ° C

 Execution WRD-H 6030 L maximum returndamping at 20 ° C

Maximum angle 180°

Execution "R" and "L" only in one direction

The values may vary depending on the adjustment and the speed

This damper is adjustable

Subject to technical changes